


# TECHNICAL DATA SHEET


Phenolic foam insulation



# AERIS

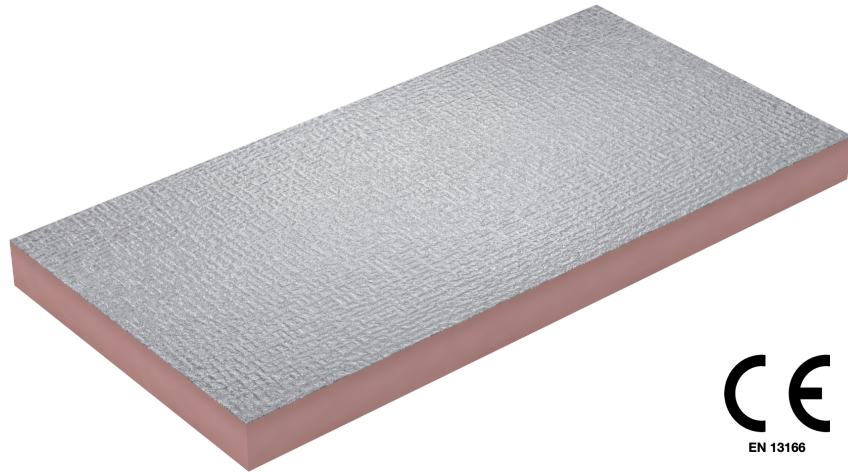

## PRODUCT DETAILS

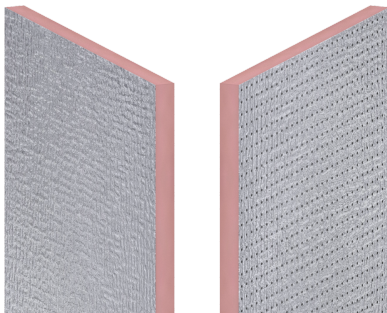

**SUPERCEL® AERIS** comprises a high performance rigid thermoset with a **phenolic resin insulation core** autohesively bonded with an **aluminum vapor barrier foil facer** on the upper side and a **micro-perforated aluminum foil facer** on the lower side.

The board is available in the following **standard dimensions**:

**1200 x 600 mm**

The following formats can be available upon request:

1200 x 1200 mm

1200 x 2400 mm

### THERMAL CONDUCTIVITY $\lambda_D$

0,019 W/mK / 0,021 W/mK

### SUGGESTED APPLICATIONS

Insulation of cavity walls  
Insulation of ventilated facades  
Insulation of heated floors  
Insulation of ceilings or roofs

### PROFILES

Standard flat profile edges or tongue and groove fastening system

### FACINGS

Aluminum vapor barrier foil facer / Micro-perforated aluminum foil facer

## ITEM SPECIFICATION

Thermal insulation performed using **SUPERCEL® AERIS** - a closed cell phenolic foam boards, with dimensions .....x..... mm, thickness ..... mm, coated with an **aluminum vapor barrier foil facer** on the upper sider and a **micro-perforated aluminum foil facer** on the lower side, CE marked according to the EN13166 standard, EPD verified (Environmental Product Declaration), having a declared thermal conductivity  $\lambda_D$ =..... W/mK, a declared thermal resistance:  $R_D$ =..... m<sup>2</sup>K/W, a reaction to fire Euroclass B-S<sub>1,d0</sub> according to EN13501-1; with compressive strength  $\geq 120$  kPa, for the insulation of cavity walls, ventilated facades or heated floors (...)\*.

\*it is advisable to complete the specifications by indicating the most relevant characteristics and performances for the specific application

## TECHNICAL CHARACTERISTICS (typical values)

### Harmonized product standard

### EN 13166:2012+A2:2016 - Thermal insulation for buildings - Factory made phenolic foam products (PF)

Thickness (d <sub>N</sub> )	mm	40	50	60	70	80	90	100	110	120	130	140	150	160	
<b>Thermal conductivity λ<sub>D</sub></b>	<b>W/mK</b>	<b>0,021</b>					<b>0,019</b>								
Thermal resistance R	m <sup>2</sup> K/W	1,90	2,38	2,86	3,33	4,21	4,74	5,26	5,79	6,32	6,84	7,37	7,89	8,42	
<b>Thermal resistance R<sub>D</sub></b>	<b>m<sup>2</sup>K/W</b>	<b>1,90</b>	<b>2,35</b>	<b>2,85</b>	<b>3,30</b>	<b>4,20</b>	<b>4,70</b>	<b>5,25</b>	<b>5,75</b>	<b>6,30</b>	<b>6,80</b>	<b>7,35</b>	<b>7,85</b>	<b>8,40</b>	
Thermal Transmittance U <sub>D</sub>	W/m <sup>2</sup> K	0,53	0,43	0,35	0,30	0,24	0,21	0,19	0,17	0,16	0,15	0,14	0,13	0,12	
Durability of Thermal Resistance against heat, weathering, aging / degradation					Determination of the aged values of thermal resistance and thermal conductivity							R <sub>D</sub> & λ <sub>D</sub>			

PROPERTIES	NORMS	UNITS	VALUES												CODE/CLASS	
Thickness (d <sub>N</sub> )	-	mm	40	50	60	70	80	90	100	110	120	130	140	150	160	
Thickness tolerance	EN 823	mm	± 2	-2/+3				-2/+5								T1
Length	EN 822	mm	600 to 2400												L <sub>i</sub>	
Width	EN 822	mm	1200												W <sub>i</sub>	
Compressive strength	EN 826	kPa	≥ 120												CS(Y)120	
Dimensional stability	EN 1604	%													DS(70,90); DS(-20,-)	
Variation thickness: 48h at 70±2°C & 90±5% R.H. 48h a -20°C		≤ 1,5 % in reduction														
Variation length and width: 48h at 70±2°C & 90±5% R.H. 48h a -20°C		≤ 1,5 % in absolute value														
Short term water absorption	EN 1609	kg/m <sup>2</sup>	≤ 0,75												WS3	
Long term water absorption	EN12087	kg/m <sup>2</sup>	≤ 1,00												WL(P)4	
Reaction to fire	EN 13501-1	Euroclass	B s <sub>1</sub> d <sub>0</sub>												RtF	
Water vapor permeability and transmission	EN 12086	μ	> 10.000												MU	
Apparent mass	EN 1602	kg/m <sup>3</sup>	37,5 ± 2,5												AD	
Operating temperature range	-	°C	-50 / +120												ST(-) / ST(+)	
Specific heat capacity	-	J/kgK	1750												c	

## INDICATIONS FOR USE

When using boards from the **SUPERCEL® Building Insulation** product range, in phenolic foam, it is advisable to keep in mind the following good practices:

- The boards must be stored, even when on site, indoors or protected by waterproof sheets, in their original packaging, dry and protected from bad weather;
- The boards must not be bonded to degraded supports;
- The boards must not be used if damaged or deteriorated;
- The boards were not designed with the intention of providing a finished covering;
- The boards must be cut using mechanical cutting.

Any small areas of non-adhesion between the facing and the foam may originate from the production cycle. These areas do not affect the physical-mechanical properties of the panels in any way. The same applies to the detachment areas caused by the installation phases relating to the bonding and leveling of the slabs when they are beaten with a trowel (or similar). Areas of non-adhesion between the facing and the foam must be removed with a cutter before proceeding to subsequent phases.

## PACKING LIST

Thickness [mm]	Format [mm]	Bards / pack	m <sup>2</sup> / pack	Pack / pal.	m <sup>2</sup> / pal.
40	1200x600	6	4,32	20	86,40
50	1200x600	8	5,76	12	69,12
60	1200x600	5	3,60	16	57,60
70	1200x600	7	5,04	10	50,40
80	1200x600	5	3,60	12	43,20
90	1200x600	5	3,60	10	36,00
100	1200x600	4	2,88	12	34,56
110	1200x600	3	2,16	14	30,24
120	1200x600	4	2,88	10	28,80
130	1200x600	3	2,16	12	25,92
140	1200x600	4	2,88	8	23,04
150	1200x600	4	2,88	8	23,04
160	1200x600	3	2,16	10	21,60

## NOTES

The boards of the **SUPERCEL® Building Insulation** product range, in expanded phenolic foam, are considered articles with reference to the European regulations (Reg. 1906/2007/EC - REACH), therefore they do not require safety data sheets. When using the product, it is advisable to wear protective gloves and glasses and to comply with the workplace safety regulations.

The information and instructions reported above, although corresponding to our best knowledge, are to be considered, in any case, purely indicative; therefore, before using the product, anyone who intends to use it is required to establish whether or not it is suitable for the intended use, and in any case, assumes any responsibility that may arise from its use.

**The most updated technical data sheet is available on the website at the following address: [www.resineisolanti.com](http://www.resineisolanti.com).**